
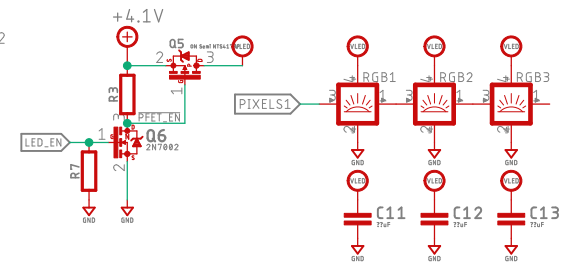


#### TODO:

- change button pins to use input only pins.
- change MOT3 MOT4 to use non-SCK/MO pins.
- MOTORS connector channel order should be reversed, should go left to right.

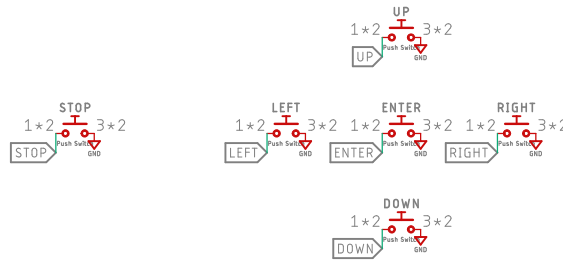

#### Bodge Notes:

- MOT2 and MOT3 don't work as they were routed onto INPUT only pins. Cut traces and moved to MO(18) and MI (19) pins.
- But SCK has signal on it during programming. Not for outputs. (or maybe pixel)
- Rev.B Move buttons to input only pins and use output pins (non-SCK) for motors.

		Document Number:	REV:
		<b>VIBE CONTROLLER</b>	
TITLE: <b>edge-lord-2000</b>	Date: 5/17/22 10:18 AM	Sheet: 1/1	